



# RF Amplifier Data Sheet

## BT-AlphaSA series

### 1kW

- NMR, MRI, EPR
- Radar
- Ultrasound
- Test & Measurement



The BT-AlphaSA series is a range of class AB RF power amplifiers covering the 500kHz to 150MHz frequency range

- Rugged, solid-state design - high reliability
- Extremely high phase and amplitude stability
- Very fast pulse rise/fall times
- High linearity
- Low power CW operation
- Very low interpulse noise
- Competitively priced

Suitable for pulsed radar, NMR, MRI, NQR, EPR, ultrasound systems and other scientific applications.

### BT-AlphaSA series

Model numbers	BT01000-AlphaSA100ms
Rated power	1kW minimum <sup>1</sup>
P1dB	800W minimum <sup>2</sup>
Type	Class AB MOSFET
Frequency	500kHz-150MHz <sup>3</sup>
Gain flatness	±2dB maximum (measured at 1/10th rated output power)
Max. duty cycle	20% <sup>4</sup>
Max. pulse width	100ms <sup>5</sup>
Rated power in CW mode	100W <sup>6</sup>
Pulse droop	0.5dB maximum <sup>7</sup>
Pulse rise and fall times	200ns risetime, 100ns falltime typical using a pre-gate RF input signal
Gate delay	Rising edge: 1200ns typical    Falling edge: 200ns typical <sup>8</sup>
Harmonics	Odd: -10dBc maximum Even: -20dBc maximum
Spurious	<-70dBc maximum
Output noise (blanked)	<10dB above thermal (1MHz bandwidth)
Phase change/power	<5° from -40dB to full power
Phase stability	<1° across 100ms pulse
Output sample	-50dB into 50 Ω (forward voltage sample)
Input/output impedance	50 Ω nominal
Load SWR	Tolerates at least 3:1 @ full rated power without shut down <sup>9</sup>
Remote interface	Parallel status monitoring via 25 pin D connector <sup>10</sup>
Connectors	RF output: N type      RF input, gate, sample: BNC <sup>11</sup>
Cooling	Forced air
Indicators	DC Power, Enable, RF Power, Over-temp, Over-duty, Mismatch, Selected, Shutdown
Gain control range	10dB typical for 0-5V control voltage
RF drive RF gate (blanking)	0dBm nominal, 10dBm for no damage 0-5V CMOS
Physical	19" Wx 500mmD x 180mmH (4RU x 19" rack mounting), 28kg
Mains power	110-240V, 50-60Hz, single phase, 3kVA max. <sup>12</sup>
Compliance	CE

1. PEP for input power of 1mW  
 2. Minimum output power at 1dB gain compression  
 3. The amp provides useful power outside this range, but performance is not guaranteed  
 4. Duty cycle is internally limited in pulsed mode. Duty cycle limit increases to approx.30% for short pulses  
 5. Maximum gate pulse width in pulsed mode (internally limited)  
 6. CW mode automatically enabled at output power level less than approx. 10% of full rated power  
 7. Measured at max. pulse width at nominal P1dB level  
 8. Rising edge measured from rising edge of GATE pulse to 90% RF output voltage. Falling edge measured from falling edge of GATE pulse to 10% RF output voltage  
 9. Self resetting protection shuts the amplifier off if the load SWR is excessive  
 10. Pin out at [www.tomcorf.com/pdf/interface.pdf](http://www.tomcorf.com/pdf/interface.pdf)  
 11. Other connector types available on request  
 12. 3 x 3-pin IEC. Mains supply must include an earth




# RF Amplifier Data Sheet

## BT-AlphaSA series

### 1kW

**Harmonics**

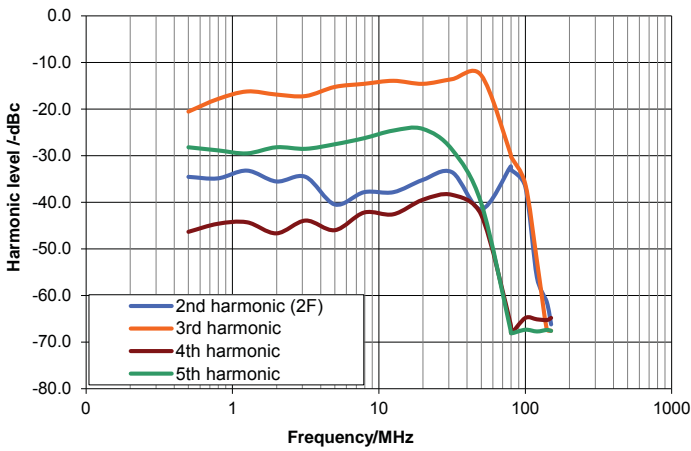

**Typical peak envelope power plots**

