



RF Amplifier Data Sheet

BT-AlphaSA series

500kHz-150MHz

250W, 500W

- NMR, MRI, EPR
- Radar
- Ultrasound
- Test & Measurement



The BT-AlphaSA series is a range of class AB RF power amplifiers covering the 500kHz to 150MHz frequency range

- Rugged, solid-state design - high reliability
- Extremely high phase and amplitude stability
- Very fast pulse rise/fall times
- High linearity
- Low power CW operation
- Very low interpulse noise
- Competitively priced

Suitable for pulsed radar, NMR, MRI, NQR, EPR, ultrasound systems and other scientific applications.

BT-AlphaSA series

Model numbers	BT00250-AlphaSA/BT00500-AlphaSA
Rated power	250/500W minimum ¹
P1dB	200/400W minimum ²
Type	Class AB MOSFET
Frequency	500kHz-150MHz ³
Gain flatness	±2dB maximum (measured at 1/10th rated output power)
Max. duty cycle	20% ⁴
Max. pulse width	100ms ⁵
Rated power in CW mode	25W/50W ⁶
Pulse droop	0.5dB maximum ⁷
Pulse rise and fall times	<100ns typical using a pre-gate RF input signal
Gate delay	Rising edge: 800ns typical Falling edge: 200ns typical ⁸
Harmonics	Odd: -12dBc maximum, Even:-20dBc maximum
Spurious	<-70dBC maximum
Output noise (blanked)	<10dB above thermal (1MHz bandwidth)
Phase change/power	<5° from -40dB to full power
Phase stability	<1° across 100ms pulse
Output sample	-50dB into 50W (forward voltage sample)
Input/output impedance	50 Ω nominal
Load SWR	Tolerates at least 3:1 @ full rated power without shut down ⁹
Remote interface	Parallel status monitoring via 25 pin D connector ¹⁰
Connectors	RF output: N type RF input, gate, sample:BNC ¹¹
Cooling	Forced air
Indicators	DC Power, Output Enable, RF Power, Over-temp, Over-duty, Load mismatch
Gain control range	10dB minimum for 0-5V control voltage
RF drive RF gate (blanking)	0dBm nominal, 10dBm for no damage 0-5V CMOS
Physical	19" Wx 500mmD x 133mmH (3RU x 19" rack mounting),28kg
Mains power	110-240V, 50-60Hz, single phase, 1kVA/2kVA max. ¹²
Compliance	CE

1. RMS PEP for input power of 1mW
 2. Minimum output power at 1dB gain compression
 3. The amp provides useful power outside this range, but performance is not guaranteed
 4. Duty cycle is internally limited in pulsed mode. Duty cycle limit increases to approx.30% for short pulses
 5. Maximum gate pulse width in pulsed mode (internally limited)
 6. CW mode automatically enabled at output power level less than approx. 10% of full rated power
 7. Measured at max. pulse width at nominal P1dB level
 8. Rising edge measured from rising edge of GATE pulse to 90% RF output voltage. Falling edge measured from falling edge of GATE pulse to 10% RF output voltage
 9. Self resetting protection shuts the amplifier off if the load SWR is excessive
 10. Pin out at www.tomcorf.com/pdf/interface.pdf
 11. Other connector types available on request
 12. 3-pin IEC. Mains supply must include an earth




RF Amplifier Data Sheet

BT-AlphaSA series

500kHz-150MHz

250W, 500W

Typical peak envelope power plots

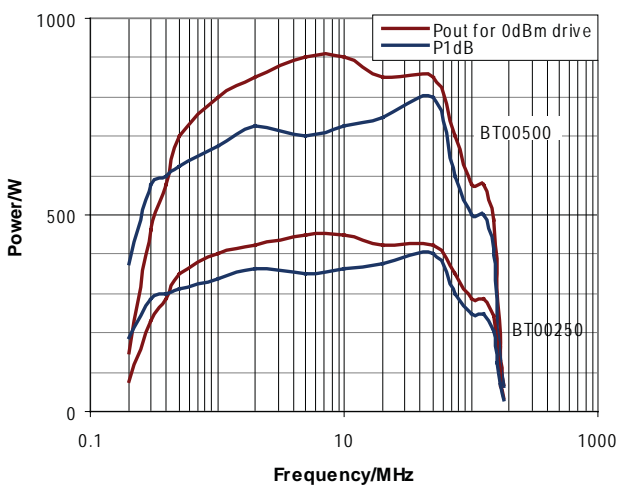

Harmonics

